


H 6150

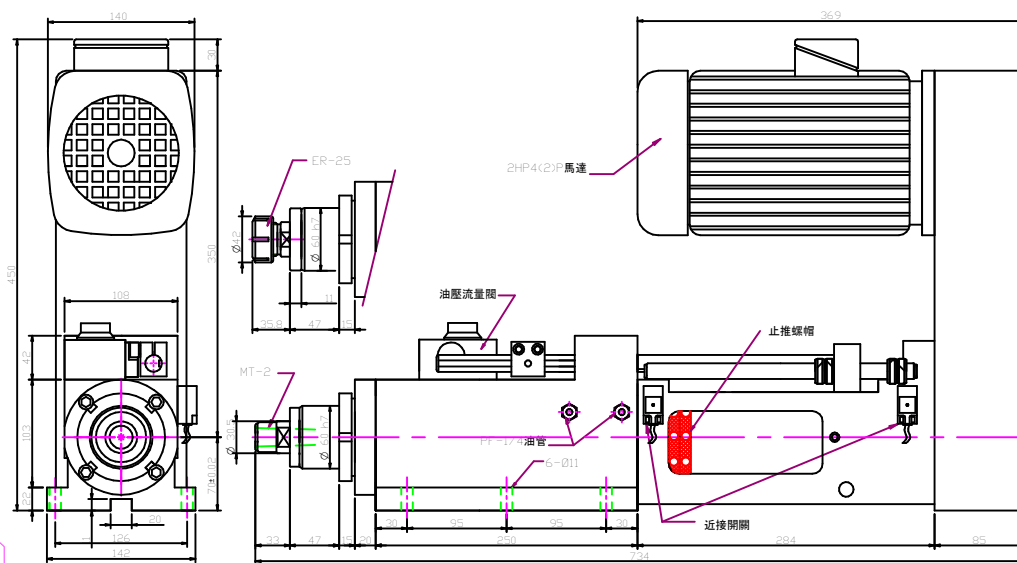

Operating Capacity	20~25kg/cm ²	Max. Speed	2,000 R.P.M	Cylinder Diameter	Ø80
Max. Drilling Capacity	Ø16(S45C)	Weight	62KG	Cylinder Area	Forward : 37.70CM ²
Spindle Taper	*ER-25 MT-2	Spindle Stroke	150M/M		Reverse : 11.8CM ²
Motor	1.5KW-2P,4P	Breaking Stroke	Adjust By Flow Control Valve	Thrust	750KG(20KG/CM) ²
				Spindle Speed	Optiona : 500RPM~2000RPM
Wearing Parts					
Spindle Bearing	32005×2,6005V×1	Piston Seal	P-70×2,USH-70*1		
Pully Bearing	6007*3		G-75×1,USH-40×1,DH-40×1		
Oil Seal - Front Cover	DH-60×1,USH-60*1,G-75×2				
Limit Switch	TL-E5NE-1×2	Belt	8M Timing Belt		